



Swept wavelength tunable lasers and booster optical amplifiers

Tunable external cavity lasers (TECL series) and tunable ring cavity lasers (TRCL series) are small-sized tunable lasers, based on semiconductor optical amplifiers (SOA). A narrow-band acousto-optical tunable filter (AOTF) is used for both series as a spectrally selective element. AOTF is a temperature stabilized element, with no moving parts, what ensures excellent stability and repeatability of the set wavelength and the tuning range in time. The emission linewidth does not exceed 0.03 – 0.10 nm (FWHM), depending on the part number, and the output optical power is 3 mW over the entire tuning range for both devices (1mW for the model at 670 – 685 nm).

Tuning range and sweep speed are user-adjustable parameters in our lasers. The lasers can operate in single sweep and continuous sweep modes, or emit light at a user-configurable wavelength.



TECL series laser



TRCL series laser



BST series booster unit

Laser output power can be further increased by using the booster optical amplifier units (BST series) based on semiconductor optical amplifiers (SOA). Depending on the spectral range at which the seed laser operates, power boosting up to 10 – 20 – 50 mW, and for certain models even up to 100 mW is possible.

Swept wavelength tunable lasers and booster optical amplifiers at 670 – 685 nm, 770 – 825 nm, 805 – 880 nm, 880 – 995 nm, 1020 – 1090 nm, 1010 – 1110 nm, and 1100 – 1190 nm spectral ranges are available.

Features

- high stability and repeatability of the wavelength;
- no mechanically moving components in the optical design;
- tuning range up to 100 nm (user-adjustable);
- linear $k(t)$ sweep;
- laser output power of 3 mW (1mW for the model at 670 – 685 nm);
- optical power boosting up to 100 mW;
- compact and easy to operate;
- control interfaces: USB, TTL on/off;
- easy integration into users' equipment.

Applications

- spectroscopy and interferometry of various types;
- full field OCT and 3D microscopy;
- industrial OCT;
- testing of optical components (splitters, photodiodes, FBGs, etc.);
- optical sensing, including FBG.

Swept wavelength tunable lasers and booster optical amplifiers

Swept wavelength tunable laser models

Parameter	Units	TRCL680.15-1	TECL790.55-3 TRCL790.55-3	TECL840.75-3 TRCL840.75-3	TECL930.115-3 TRCL930.115-3	TECL1060.70-3 TRCL1060.70-3 TRCL1060.100-3	TRCL1145.80-3	Custom lasers at 1300 – 1550 nm
Wavelength tuning range	nm	670 – 685	770 – 825	805 – 880 ¹	880 – 995	1020 – 1090 (1010 – 1110 for TRCL1060.100-3)	1105 – 1185	Contact us ²
Output optical power	mW	1	3	3 ¹	3	3	3	3
Linewidth (FWHM)	nm	≤ 0.04	≤ 0.05			≤ 0.08		≤ 0.10
Optical fiber (Corning PANDA PM)	PM63-U25D	PM85-U25D			PM98-U25D			PM13-U25D
Wavelength setting accuracy	nm	0.01						
Power change over the tuning range	%	±10						
Tuning/sweep speed (changeable)	nm/s	1 – 10000						
Tuning/sweep speed setting accuracy	nm/s	1						
Minimum tuning range (continuous tuning, changeable)	nm	5 (1 on request)						
Peak-to-ASE excess, any wavelength within the tuning range	dB	> 30 (TECL) > 60 (TRCL)						
Signal-to-ASE ratio (integral), any wavelength within the tuning range	rel. units	> 9:1 (TECL) > 99:1 (TRCL)						
Output PER	dB	≥ 15						
Output optical connector	FC/APC, narrow key (2.0 mm)							
Built-in modes	Manual wavelength tuning Wavelength sweeping, internal triggering Wavelength sweeping, external triggering Single sweep							

¹ Models providing 10 mW output power with 820 – 860 nm tunability, and 20 mW output power with 825 – 850 nm tunability are available on request.

² Please contact us with your specific requirements so that we can customize the product accordingly.

Booster optical amplifier models


Parameter	Units	BST680.15-10	BST790.55-20	BST840.75-20	BST840.50-50	BST840.30-100	BST930.115-20	BST1060.70-20 BST1060.100-20	BST1145.80-20
Central wavelength	nm	670 – 685	790 ± 5	840 ± 5	840 ± 5	840 ± 5	935 ± 5	1055 ± 5	1145 ± 5
Gain bandwidth	nm	15 ± 2	55 ± 2	75 ± 2	50 ± 2	30 ± 2	115 ± 2	70 ± 2 (100 ± 2 for BST1060.100-20)	80 ± 2
Output optical power	mW	10	20	20	50	100	20	20	20
Optical fiber (Corning PANDA PM)		PM63-U25D	PM85-U25D					PM98-U25D	
Input optical power	mW	0.6	1.5						
Peak-to-ASE excess, any wavelength within the tuning range	dB	> 20 (with TECL as a seed laser) > 30 (with TRCL as a seed laser)							
Signal-to-ASE ratio (integral), any wavelength within the gain bandwidth	rel. units	> 2:3 (with TECL as a seed laser) > 9:1 (with TRCL as a seed laser)							
Output PER	dB	≥ 15							
Optical connectors		FC/APC, narrow key (2.0 mm)							




Swept wavelength tunable lasers and booster optical amplifiers

Typical performance examples


Optical spectra for TECL series
(for TECL840.75-3)

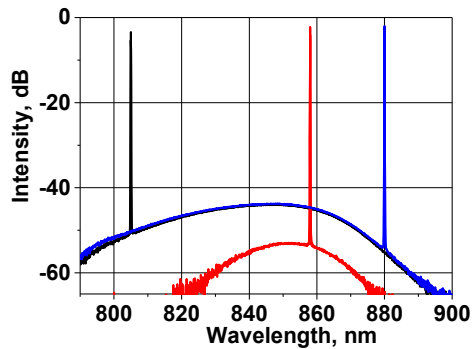

Optical spectra for TRCL series
(for TRCL840.75-3)

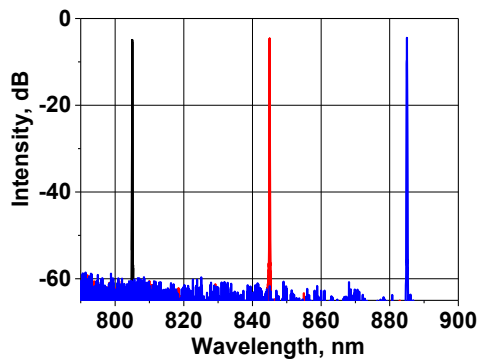

Typical coherence function
(for TECL840 and TRCL840)

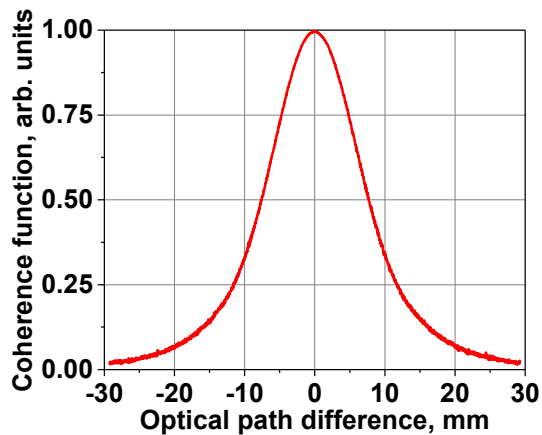

Long term wavelength stability
(no warming up, 22 ± 2 °C ambient,
for TECL840 and TRCL840)

